




1615 Robertson Road
PO Box 457
Moberly, MO 65270
800-568-1067
Fax 800-881-3806
www.pepcoinc.com

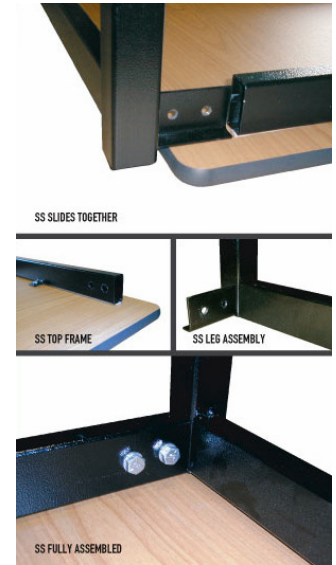

Steel Series

Specifications

-11 gauge 1.5" square A500 steel tubing legs, 14 gauge 1"x2" A500 steel tubing aprons with fillet welded cross brace.

-Each table consists of 3 parts, fillet welded H-Frame top assembly and fillet welded leg assemblies which slide into the top frame and are fastened by (8) 3/8" x 3/4" Type F hex bolts, four per side through specially designed 7 gauge threaded A500 fillet welded assembly flanges yielding a fully unitized table frame once assembled.

-Electro statically applied epoxy powder coated steel frame in black, textured for scratch resistance.

-Tops mounted to steel frame with mechanical and proprietary adhesive fastening at our factory

-3/8" x 16 threaded inserts with 1.5" steel glides, adjustable to 1.5" for floor leveling purposes.

-ADA compliant knee clearance on 30" table height.

-15 Year Warranty, bar code product ID on every table ties into our computer system

-Ships KDF (knocked down flat) on narrow pallets for efficient handling minimizing freight damage, straightforward assembly by Pepco certified installers at the job site

Options

- Tops :
 - Solid epoxy resin 3/4" or 1"
 - Solid phenolic resin by Trespa® 3/4" or 1"
 - Eco-resin© solid phenolic 3/4"
- Adjustable height option (29"-41") in 1" increments with stainless steel leg inserts.
- Casters (Swivel, Double locking)
- GFCI Protected Electrical Outlets (1-4)
- Greenlaw overhead rod assembly